Pellet Burner APOPLIM 15, 25, 35, 45,75,95,120,150



Minimal Design

Characteristics

- Patimat technology (see below)
- Easy installation and set-up Just connect 2 cables and is ready to run!



Common Characteristics of all Axinar burners

A robust, reliable burner

High quality materials in combustion chamber to increase life time.

Patimat technology: Easy installation and set-up

Patimat technology is the new innovative techology by Axinar used to adapt the boiler to customers enviroment easily and reach maximum performance. Setup and configure the burner settings within 2-minutes!

Automatic prompt for annual service

Notifying the end customer when is time for service easy to maintenance

Ceramic igniter (1200°C)

Ignition time from 25 to 35sec.

Even in extreme testing at -28°C we have ignition in 45sec.! Ask for more information.

Auto ash/clinger cleaning (modular design)

Pellets with lower quality and high ash content can be used as well, without causing problems, since ash is auto cleaned.

OEM supply possible

increase the value of your company by adding a high quality burner in your list of products with your own brand name on it.

In accordance with EN 15270 regulation






Pellet Burner

TSOVEA 45, 75, 95, 120, 150 kW

Contemporary Technologies



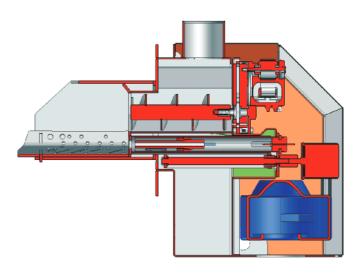

Characteristics

The new innovative **TSOVEA** burner by Axinar, combines high quality materials and contemporary technologies in order to provide a complete heating solution that meet international standards.

The enhanced features of TSOVEA are:

- Simple and guided Installation and set-up.
- User-friedly interface using your own tablet or smartphone.
- High performance and low emissions.
- Remote monitoring, control and update.
- Calculating the economical profit and the environmental footprint of the boiler.













Industrial Area of Oreokastro 570 13 Thessaloniki, Hellas Tel: +30.2310.808.159

e-mail: sales@axinar.com url: www.axinar.com



